


Cable Grommets

THE FRONTLINE OF INNOVATION




Cable Grommets

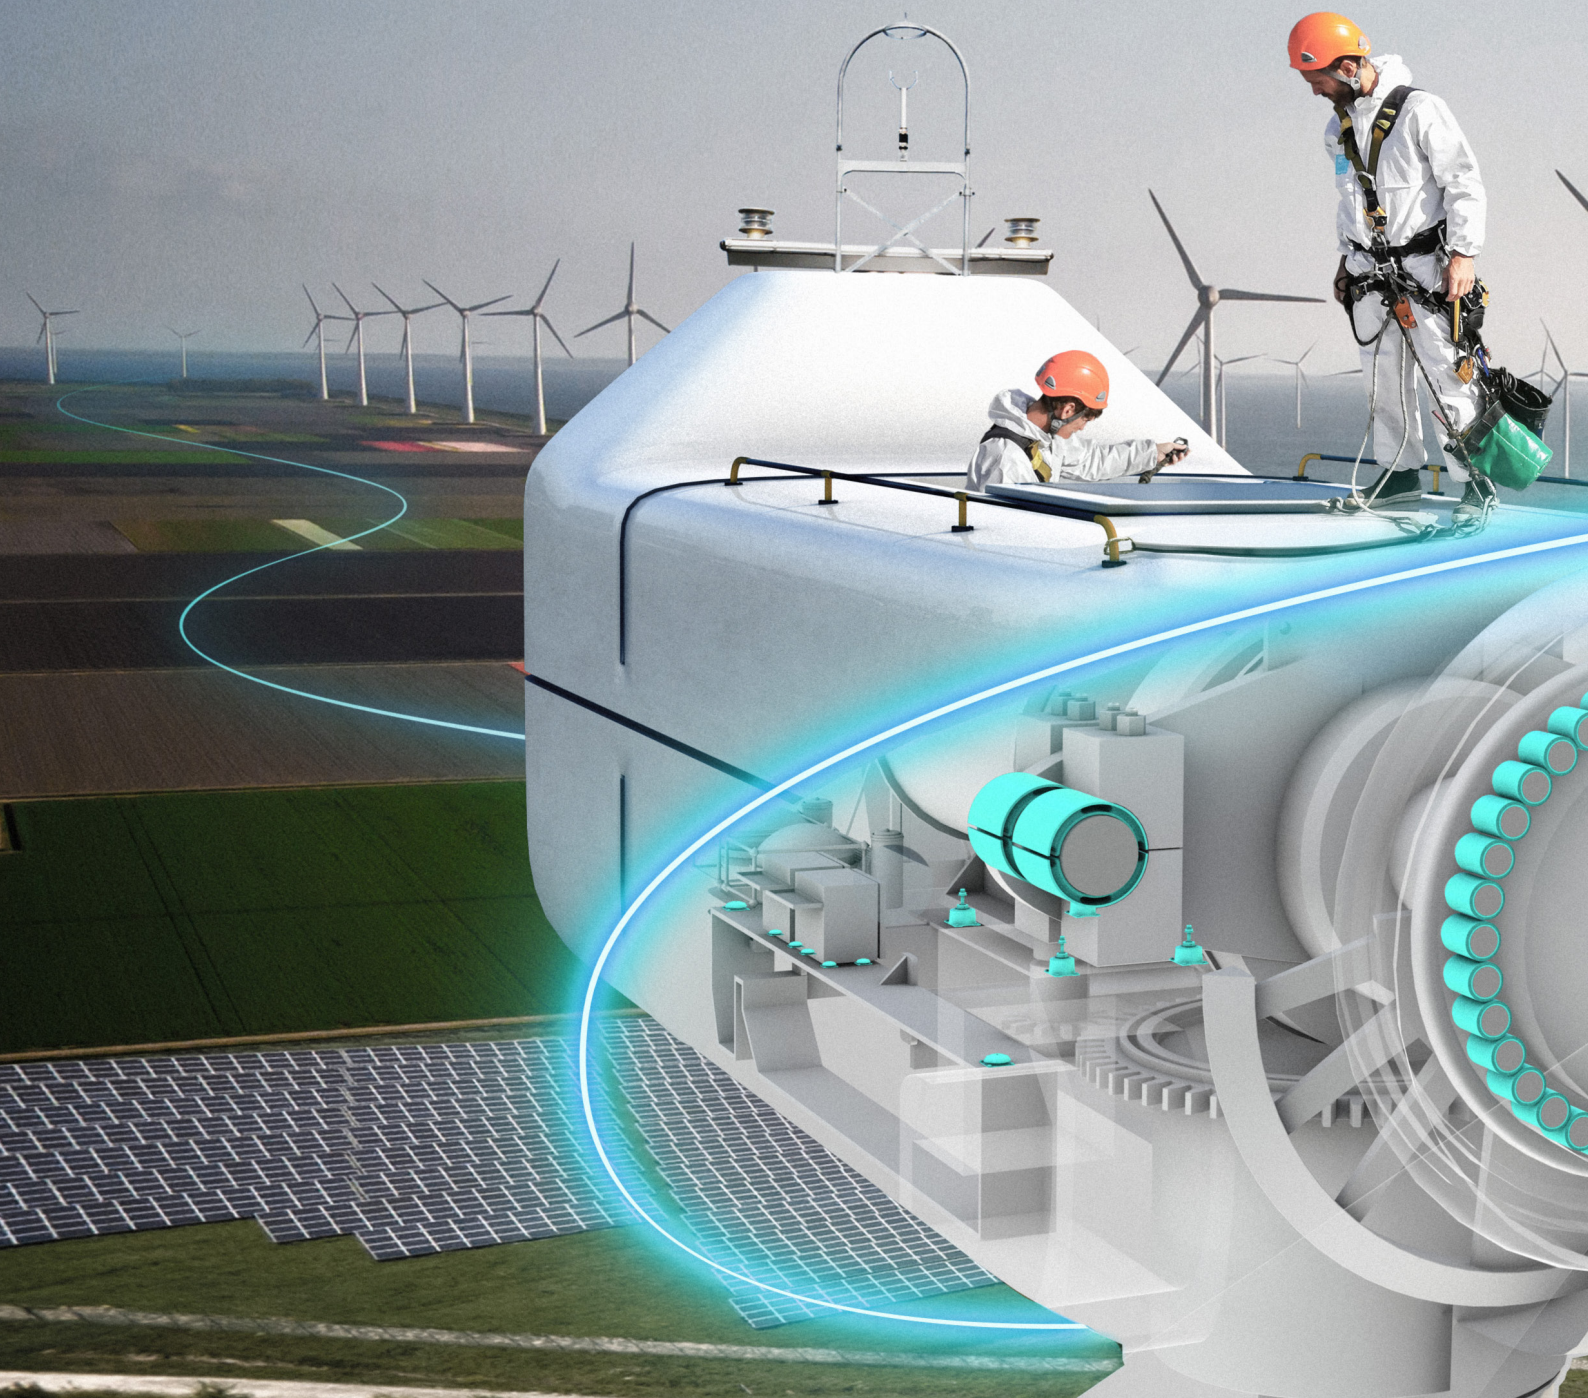



Explore the versatility of Trelleborg Cable Grommets, designed with a variety of configurations to cater to specific IP ratings and applications. These adaptable grommets are ideal for guiding both low and medium voltage power cables, tubes, and hoses. Choose from options that align with cut-outs based on PG dimensions or millimeter dimensions.

Crafted from a range of polymers, Trelleborg Cable Grommets not only ensure RoHS compliance but also exhibit outstanding weather resistance. Moreover, our product line includes fire retardant and oil-resistant models, providing a comprehensive solution to meet diverse requirements.




Cable Grommets T-VET



Dimensions

All dimensions to be used only as reference and not for quality control purposes



Advantages

- Fast and easy assembly
- Double sealing with high IP protection
- Suitable for both indoor and outdoor use
- Fit PG cut-out dimensions

Technical Specification

Material: thermoplastic elastomer

Colour: light grey and black



Degree of protection: IP67

Flammability classification: UL94 V-0

Material service temperature (unstressed): -40°C...+100°C

Non-UL material versions available on request

Art.No.	Description	Cable diameter	Cut-out	Cut-out Ø	A	B	Plate thickness	Box size
100746	T-VET 3-5 LIGHT GREY UL94 V-0	3mm - 5mm	PG7	Ø12.5mm	20	20	1mm - 4mm	1800
100747	T-VET 3-5 BLACK UL94 V-0	3mm - 5mm	PG7	Ø12.5mm	20	20	1mm - 4mm	1800
100749	T-VET 5-7 LIGHT GREY UL94 V-0	5mm - 7mm	PG9	Ø15.5mm	20	22	1mm - 4mm	1500
100187	T-VET 5-7 BLACK UL94 V-0	5mm - 7mm	PG9	Ø15.5mm	20	22	1mm - 4mm	1500
100751	T-VET 7-10 LIGHT GREY UL94 V-0	7mm - 10mm	PG11	Ø18.5mm	24	24	1mm - 4mm	1200
100188	T-VET 7-10 BLACK UL94 V-0	7mm - 10mm	PG11	Ø18.5mm	24	24	1mm - 4mm	1200
100190	T-VET 10-14 LIGHT GREY UL94 V-0	10mm - 14mm	PG16	Ø22.5mm	30	27	1mm - 4mm	700
100191	T-VET 10-14 BLACK UL94 V-0	10mm - 14mm	PG16	Ø22.5mm	30	27	1mm - 4mm	700
100192	T-VET 14-20 LIGHT GREY UL94 V-0	14mm - 20mm	PG21	Ø28.5mm	34	29	1mm - 4mm	400
100193	T-VET 14-20 BLACK UL94 V-0	14mm - 20mm	PG21	Ø28.5mm	34	29	1mm - 4mm	400
100755	T-VET 20-26 LIGHT GREY UL94 V-0	20mm - 26mm	PG29	Ø37mm	46	34	1mm - 4mm	250
100195	T-VET 20-26 BLACK UL94 V-0	20mm - 26mm	PG29	Ø37mm	46	34	1mm - 4mm	250
100197	T-VET 26-35 LIGHT GREY UL94 V-0	26mm - 35mm	PG36	Ø47mm	58	40	1mm - 4mm	120
100198	T-VET 26-35 BLACK UL94 V-0	26mm - 35mm	PG36	Ø47mm	58	40	1mm - 4mm	120




Cable Grommets T-GET



Dimensions

All dimensions to be used only as reference and not for quality control purposes



Advantages

- Fast and easy assembly
- Double sealing with high IP protection
- Suitable for both indoor and outdoor use
- Fit PG cut-out dimensions in mm

Technical Specification

Material: thermoplastic elastomer

Colour: light grey and black

Degree of protection: IP67

Flammability classification: UL94 V-0

Material service temperature (unstressed): -40°C...+100°C

Non-UL material versions available on request

Art.No.	Description	Cable diameter	Cut-out	Cut-out Ø	A	B	Plate thickness	Box size
100723	T-GET 3-5 LIGHT GREY UL 94 V-0	3mm - 5mm	M12	Ø12.5mm	19	21	1mm - 5mm	1500
100724	T-GET 3-5 BLACK UL94 V-0	3mm - 5mm	M12	Ø12.5mm	19	21	1mm - 5mm	1500
100726	T-GET 5-7 LIGHT GREY UL94 V-0	5mm - 7mm	M16	Ø16.5mm	23	22	1mm - 5mm	1500
100727	T-GET 5-7 BLACK UL94 V-0	5mm - 7mm	M16	Ø16.5mm	23	22	1mm - 5mm	1500
100729	T-GET 7-10 LIGHT GREY UL94 V-0	7mm - 10mm	M20	Ø20.5mm	27	25	1mm - 5mm	1000
100730	T-GET 7-10 BLACK UL94 V-0	7mm - 10mm	M20	Ø20.5mm	27	25	1mm - 5mm	1000
100732	T-GET 10-14 LIGHT GREY UL94 V-0	10mm - 14mm	M25	Ø25.5mm	32	25	1mm - 5mm	600
100733	T-GET 10-14 BLACK UL94 V-0	10mm - 14mm	M25	Ø25.5mm	32	25	1mm - 5mm	600
100735	T-GET 14-20 LIGHT GREY UL94 V-0	14mm - 20mm	M32	Ø32.5mm	39	29	1mm - 5mm	400
100736	T-GET 14-20 BLACK UL94 V-0	14mm - 20mm	M32	Ø32.5mm	39	29	1mm - 5mm	400
100183	T-GET 20-26 LIGHT GREY UL94 V-0	20mm - 26mm	M40	Ø40.5mm	46	33	1mm - 5mm	250
100184	T-GET 20-26 BLACK UL94 V-0	20mm - 26mm	M40	Ø40.5mm	46	33	1mm - 5mm	250
100739	T-GET 26-35 LIGHT GREY UL94 V-0	26mm - 35mm	M50	Ø50.5mm	57	40	1mm - 5mm	140
100740	T-GET 26-35 BLACK UL94 V-0	26mm - 35mm	M50	Ø50.5mm	57	40	1mm - 5mm	140
100741	T-GET 30-45 LIGHT GREY UL94 V-0	30mm - 45mm	M63	Ø63.5mm	69	61	1mm - 5mm	175
100185	T-GET 30-45 BLACK UL94 V-0	30mm - 45mm	M63	Ø63.5mm	69	61	1mm - 5mm	175
100742	T-GET 40-60 GREY UL94 V-0	40mm - 60mm	M75	Ø76mm	89	79	1.2mm - 5.2mm	80
100743	T-GET 40-60 BLACK UL94 V-0	40mm - 60mm	M75	Ø76mm	89	79	1.2mm - 5.2mm	80


IP67
EN 60529RoHS
Compliant

Cable Grommets VET



Dimensions

All dimensions to be used only as reference and not for quality control purposes



Advantages

- Fast and easy assembly
- Double sealing with high IP protection
- Suitable for both indoor and outdoor use
- Fit PG cut-out dimensions

Technical Specification

Material: EPDM rubber

Material properties: halogen-free



Colour: grey and black

Degree of protection: IP67

Material service temperature (unstressed): -40°C...+120°C

Other materials (VMQ,CR) available on request

Art.No.	Description	Cable diameter	Cut-out	Cut-out Ø	A	B	Plate thickness	Box size
100715B	VET 3-5 BLACK EPDM	3mm - 5mm	PG7	Ø12.5mm	20	13	1mm - 4mm	1000
100716B	VET 3-5 GREY EPDM	3mm - 5mm	PG7	Ø12.5mm	20	13	1mm - 4mm	1000
100306B	VET 5-7 BLACK EPDM	5mm - 7mm	PG9	Ø15.5mm	20	20	1mm - 4mm	1000
100307B	VET 5-7 GREY EPDM	5mm - 7mm	PG9	Ø15.5mm	20	20	1mm - 4mm	1000
100291B	VET 8-14 BLACK EPDM	8mm - 14mm	PG11	Ø18.5mm	28	24	1mm - 4mm	1000
100292B	VET 8-14 GREY EPDM	8mm - 14mm	PG11	Ø18.5mm	28	24	1mm - 4mm	1000
100295B	VET 7-10 BLACK EPDM	7mm - 10mm	PG16	Ø22.5mm	24	21	1mm - 4mm	1000
100296B	VET 7-10 GREY EPDM	7mm - 10mm	PG16	Ø22.5mm	24	21	1mm - 4mm	1000
100297B	VET 14-20 BLACK EPDM	14mm - 20mm	PG21	Ø28.5mm	34	26	1mm - 4mm	500
100298B	VET 14-20 GREY EPDM	14mm - 20mm	PG21	Ø28.5mm	34	26	1mm - 4mm	500
100300B	VET 20-26 BLACK EPDM	20mm - 26mm	PG29	Ø37mm	46	30	1mm - 4mm	500
100301B	VET 20-26 GREY EPDM	20mm - 26mm	PG29	Ø37mm	46	30	1mm - 4mm	500
100304B	VET 26-35 BLACK EPDM	26mm - 35mm	PG36	Ø47mm	57.5	30	1mm - 4mm	200
100305B	VET 26-35 GREY EPDM	26mm - 35mm	PG36	Ø47mm	57.5	30	1mm - 4mm	200




Cable Grommets GET



Dimensions

All dimensions to be used only as reference and not for quality control purposes

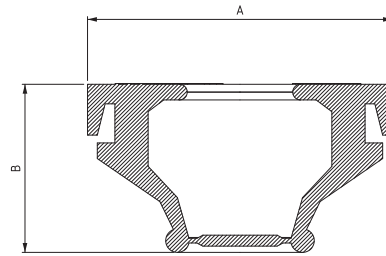

Advantages

- Fast and easy assembly
- Double sealing with high IP protection
- Suitable for both indoor and outdoor use
- Fit PG cut-out dimensions in mm

Technical Specification

Material: EPDM rubber

Material properties: halogen-free

Colour: grey and black

Degree of protection: IP67

Material service temperature (unstressed): -40°C...+120°C

Other materials (VMQ,CR) available on request

Art.No.	Description	Cable diameter	Cut-out	Cut-out Ø	A	B	Plate thickness	Box size
100589B	GET 3-5 BLACK EPDM	3mm - 5mm	M12	Ø12.5mm	19	19	1.3 - 5mm	1000
100590B	GET 3-5 GREY EPDM	3mm - 5mm	M12	Ø12.5mm	19	19	1.3 - 5mm	1000
100587B	GET 5-7 BLACK EPDM	5mm - 7mm	M16	Ø16.5mm	23	19	1.3 - 5mm	1000
100231B	GET 5-7 GREY EPDM	5mm - 7mm	M16	Ø16.5mm	23	19	1.3 - 5mm	1000
100578B	GET 7-10 BLACK EPDM	7mm - 10mm	M20	Ø20.5mm	27	20	1.3 - 5mm	1000
100226B	GET 7-10 GREY EPDM	7mm - 10mm	M20	Ø20.5mm	27	20	1.3 - 5mm	1000
100574B	GET 10-14 BLACK EPDM	10mm - 14mm	M25	Ø25.5mm	32	20	1.3 - 5mm	1000
100167B	GET 10-14 GREY EPDM	10mm - 14mm	M25	Ø25.5mm	32	20	1.3 - 5mm	1000
100227B	GET 14-20 BLACK EPDM	14mm - 20mm	M32	Ø32.5mm	39	22	1.3 - 5mm	500
100228B	GET 14-20 GREY EPDM	14mm - 20mm	M32	Ø32.5mm	39	22	1.3 - 5mm	500
100583B	GET 20-26 BLACK EPDM	20mm - 26mm	M40	Ø40.5mm	47	24	1.3 - 5mm	500
100584B	GET 20-26 GREY EPDM	20mm - 26mm	M40	Ø40.5mm	47	24	1.3 - 5mm	500
100229B	GET 26-35 BLACK EPDM	26mm - 35mm	M50	Ø50.5mm	58	30	1.3 - 5mm	200
100230B	GET 26-35 GREY EPDM	26mm - 35mm	M50	Ø50.5mm	58	30	1.3 - 5mm	200
100223B	GET 30-45 BLACK EPDM	30mm - 45mm	M63	Ø63.5mm	69	45	1.3 - 5mm	100
100224B	GET 30-45 GREY EPDM	30mm - 45mm	M63	Ø63.5mm	69	45	1.3 - 5mm	100
100573B	GET 40-60 BLACK EPDM	40mm - 60mm	M75	Ø76mm	90	60	1.3 - 5mm	50
100225B	GET 40-60 GREY EPDM	40mm - 60mm	M75	Ø76mm	90	60	1.3 - 5mm	50


IP54
EN 60529IP65
EN 60529RoHS
Compliant

Cable Grommets T-GD



Dimensions

All dimensions to be used only as reference and not for quality control purposes

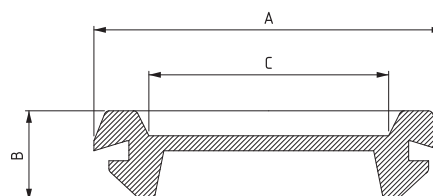

Advantages

- Fast and easy assembly
- Suitable for both indoor and outdoor use
- Fit PG cut-out dimensions
- Can be used as a plug

Technical Specification

Material: thermoplastic elastomer

Colour: black

Flammability classification: UL94 V-0

Degree of protection: IP54 (IP65 if used as a plug)

Material service temperature (unstressed): -40°C...+100°C

Non-UL material versions available on request

Art.No.	Description	Cut-out	Cut-out Ø	A	B	C	Plate thickness	Box size
100174	T-GD 9 PG BLACK	PG9	Ø15mm	20	7	9	1mm - 2mm	3000
100175	T-GD 11 PG BLACK	PG11	Ø18.5mm	23	7	11	1mm - 2mm	3000
100176	T-GD 13.5 PG BLACK	PG13.5	Ø20.5mm	25	7	13.5	1mm - 2mm	2500
100177N	T-GD 16 PG BLACK	PG16	Ø22mm	28	7	16	1mm - 2mm	2500
100178	T-GD 21 PG BLACK	PG21	Ø28.5mm	35	9	21	1mm - 2mm	1000
100179	T-GD 29 PG BLACK	PG29	Ø37mm	44	10	29	1mm - 2mm	500
100180	T-GD 36 PG BLACK	PG36	Ø47mm	54	12	36	1.5mm - 3mm	200
100181	T-GD 48 PG BLACK	PG48	Ø59.5mm	68	12	48	1.5mm - 3mm	200
100182	T-GD 53 PG BLACK	PG53	Ø64mm	75	12	53	1.5mm - 3mm	200
100721	T-GD 69 PG BLACK	PG69	Ø80mm	90	12	69	1.5mm - 3mm	100



IP54
EN 60529

IP65
EN 60529




RoHS
Compliant

Cable Grommets T-GDM



Dimensions

All dimensions to be used only as reference and not for quality control purposes

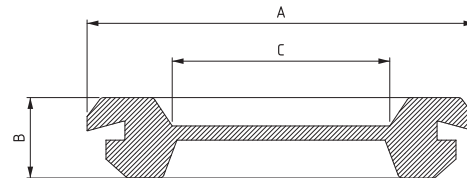

Advantages

- Fast and easy assembly
- Suitable for both indoor and outdoor use
- Fit PG cut-out dimensions in mm
- Can be used as a plug

Technical Specification

Material: thermoplastic elastomer

Colour: black

Flammability classification: UL94 V-0

Degree of protection: IP54 (IP65 if used as a plug)

Material service temperature (unstressed): -40°C...+100°C

Non-UL material versions available on request

Art.No.	Description	Cut-out	Cut-out Ø	A	B	C	Plate thickness	Box size
103665	T-GDM 9 MM BLACK	M12	Ø12.5mm	17	7	9	1mm - 2mm	3000
103933N	T-GDM 11 MM BLACK	M16	Ø16.5mm	21	7	11	1mm - 2mm	3000
100176	T-GDM 13,5 MM BLACK	M20	Ø20.5mm	25	7	13,5	1mm - 2mm	2500
100200	T-GDM 16 MM BLACK	M25	Ø25.5mm	32	7	16	1mm - 2mm	2500
102342N	T-GDM 21 MM BLACK	M32	Ø32.5mm	40	9	21	1mm - 2mm	1000
103523N	T-GDM 29 MM BLACK	M40	Ø40.5mm	48	10	29	1mm - 2mm	500
104019N	T-GDM 36 MM BLACK	M50	Ø50.5mm	58	12	36	1.5mm - 3mm	200
100181	T-GDM 48 MM BLACK	M63	Ø63.5mm	68	12	48	1.5mm - 3mm	200
104022N	T-GDM 53 MM BLACK	M75	Ø76mm	81	12	53	1.5mm - 3mm	100
104023N	T-GDM 69 MM BLACK	M90	Ø83.5mm	91	12	69	1.5mm - 3mm	100

IP65
EN 60529



RoHS
Compliant




Cable Grommets T-RGDM



Dimensions

All dimensions to be used only as reference and not for quality control purposes

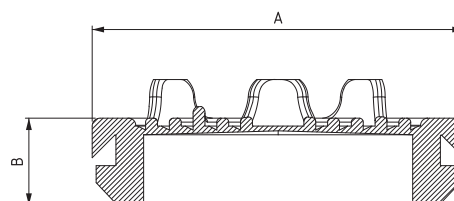

Advantages

- Fast and easy assembly
- Sealing rings can easily be pulled off without extra tools
- Suitable for both indoor and outdoor use
- Fit M40, M50 or M60 cut-out

Technical Specification

Material: thermoplastic elastomer

Colour: grey and black

Flammability classification: UL94 V-0 halogen-free

Degree of protection: IP65

Material service temperature (unstressed):
-40 °C...+90 °C

Art.No.	Description	1 Cable diameter	Cut-out	Cut-out Ø	A	B	Plate thickness	Box size
107166	T-RGDM 40 BLACK UL94 V-0	10mm - 34mm	M40	Ø40.5mm	47	11	1 - 3.5 mm	400
108421	T-RGDM 40 LIGHT GREY UL94 V-0	10mm - 34mm	M40	Ø40.5mm	47	11	1 - 3.5 mm	400
106995	T-RGDM 50 BLACK UL94 V-0	12mm - 44mm	M50	Ø50.5mm	57	11	1 - 3.5 mm	250
108422	T-RGDM 50 LIGHT GREY UL94 V-0	12mm - 44mm	M50	Ø50.5mm	57	11	1 - 3.5 mm	250
107167	T-RGDM 60 BLACK UL94 V-0	12mm - 54mm	M60	Ø60.5mm	67	11	1 - 3.5 mm	200
108423	T-RGDM 60 LIGHT GREY UL94 V-0	12mm - 54mm	M60	Ø60.5mm	67	11	1 - 3,5 mm	200



IP54

EN 60529

REACH

COMPLIANT - COMPLIANT

RoHS

Compliant

Cable Grommets M 20-80



Advantages


- Suitable for cable diameters up to 80mm
- Suitable for both indoor and outdoor use

Technical Specification

Material: thermoplastic elastomer
Colour: grey and black
Flammability classification: UL94 V-0
Degree of protection: IP54
Material service temperature (unstressed):
-40 °C...+100 °C
Non-UL material versions available on request

Dimensions

All dimensions to be used only as reference and not for quality control purposes

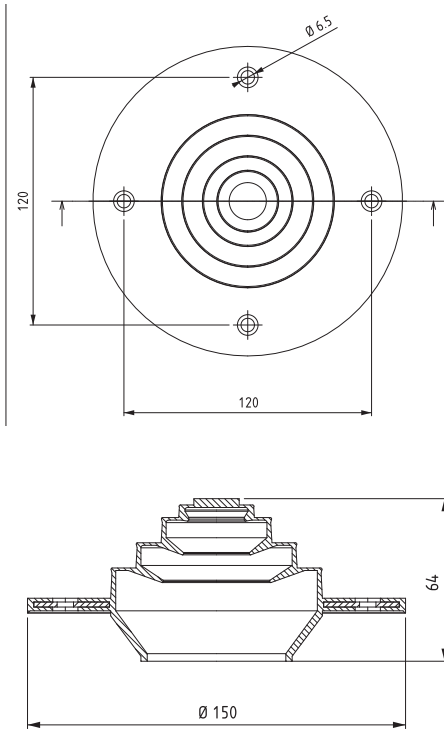

Art.No.	Description	Box size	Packing
104049	M 20-80 LIGHT GREY UL94 V-0	50	Bulk
101035	M 20-80 BLACK UL94 V-0	50	Bulk



Trelleborg Antivibration Solutions (AVS) - Leading the Frontier of Innovation in Noise and Vibration Control. With our advanced polymer technology and expertise in rubber-to-metal bonding, we're pioneers in combating noise and vibration. As part of Trelleborg Group's Industrial Solutions, we bring over a century of excellence to various sectors like rail, marine, and industrial. Our focus is on crafting isolation, attenuation, and suspension solutions that redefine quality and reliability. Our new value proposition, "The Frontline of Innovation," signifies our commitment to pushing polymer technology's limits. We enhance comfort, safety, and efficiency while extending product life and optimizing costs. Join us at Trelleborg AVS for innovation-driven excellence.



Website



Linked In



**TRELLEBORG INDUSTRIAL
PRODUCTS FINLAND OY**
KIKKERLÄNTIE 72
38300 SASTAMALA
FINLAND



**TRELLEBORG INDUSTRIAL AVS
INDIA PVT LTD**
RAJDHANI INDUSTRIAL PARK,
PLOT 285, KIADB AVVERHALLI
INDUSTRIAL AREA
562 2111 BANGALORE
INDIA



**TRELLEBORG AVS
(SUZHOU) CO., LTD**
BUILDING P, PHASE III PLAINVIM
INTERNATIONAL SUXIANG SCIENCE
INDUSTRIAL PARK, CHUNXING ROAD 46,
XIANGCHENG DISTRICT
215000 SUZHOU
CHINA

www.trelleborg.com/en/anti-vibration-solutions/products-and-solutions/cable-entry-solutions
e-mail: ces@trelleborg.com